

MuleSoft.MCD-Assoc.v2020-02-09.q10

Exam Code: MCD-Assoc
Exam Name: MuleSoft Certified Developer - Integration and API Associate (Mule 3)
Certification Provider: MuleSoft
Free Question Number: 10
Version: v2020-02-09
of views: 325
of Questions views: 1189
<https://www.freecram.com/torrent/MuleSoft.MCD-Assoc.v2020-02-09.q10.html>

NEW QUESTION: 1

Refer to the exhibit. What is the payload at the end of the flow?



```
<flow name= "enrichNameFlow">
  <http:listener config-ref= "HTTP_Listener_Configuration" path= "/fullname"
doc:name= "HTTP /fullname">
  <set-payload value= "#['Alice']" doc:name= "Set Payload to Alice"/>
  <enricher target= "flowVars.firstName" doc:name= "Message Enricher">
    <set-payload value= "#['Bob']" doc:name= "Set Payload to Bob" />
  </enricher>
  <set-payload value= "#['Green']" doc:name= "Set Payload to Green" />
  <enricher target= "flowVars.lastName" doc:name= "Message Enricher">
    <set-payload value= "#['Smith']" doc:name= "Set Payload to Smith" />
  </enricher>
  <set-payload value= "#[flowVars.firstName + ' ' + payload]"
    doc:name= "Set Payload to flowVars.firstName + ' ' + payload" />
</flow>
```

- A. Bob Green
- B. Alice Green
- C. Bob Smith
- D. Alice Smith


Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 2

Refer to the exhibits. What DataWeave transformation calls the flow with the following input payload?

payload

```
{
  {
    "orderID"      : 592
    "shipping"    : "international",
    "item"        : "T-shirt Navy",
    "size"        : "L",
    "price"       : 24.99,
    "code"        : "USA"
  },
  {
    "orderID"      : 972
    "shipping"    : "domestic",
    "item"        : "Cargo shorts",
    "size"        : "L",
    "price"       : 49.99,
    "code"        : "AEG"
  },
  {
    "orderID"      : 396
    "shipping"    : "international",
    "item"        : "Long sleeve shirt women",
    "size"        : "S",
    "price"       : 24.99,
    "code"        : "AU"
  }
}
```

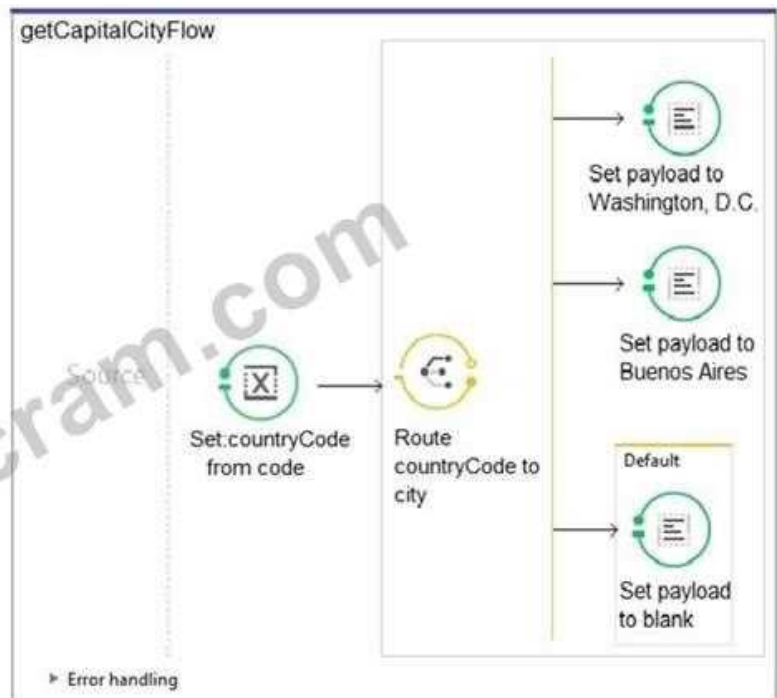

```
<flow name= "getCapitalCityFlow">
  <set-variable variableName= "countryCode" value= "#[payload.code]"
    doc:name= "Set countryCode from code" />

  <choice doc:name= "Route countryCode to city">
    <when expression= "#[flowVars.countryCode=='USA']">
      <set-payload value= "#['Washington, D.C.']" doc:name=
"Set payload to Washington, D.C." />
    </when>
    <when expression= "#[flowVars.countryCode=='AEG']">
      <set-payload value= "#['Buenos Aires']" doc:name= "Set payload
to Buenos Aires" />
    </when>
    <otherwise>
      <set-payload value= "#['']" doc:name= "Set payload to blank"/>
    </otherwise>
  </choice>
</flow>
```

A.

```
payload map {
  code: $.code,
  capital: getCapitalCityFlow($.code)
}
```

B.

```
payload map {
  code: $code,
  capital: getCapitalCityFlow({code:$code})
}
```

C.

```
payload map {
  code: $.code,
  capital: lookup("getCapitalCityFlow", $.code)
}
```

D.

```
payload map {
  code: $code,
  capital: lookup("getCapitalCityFlow", {code:$code})
}
```

A. Option B

B. Option C

C. Option D

D. Option A

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 3

A Mule application is created with an HTTP inbound endpoint defined to receive `custName` and `accountType` as query parameters. The `accountType` is captured using a Set Variable transformer with the same name.

What is the correct MEL expression for logging `accountType`?

A. `#[message."http.query.params".accountType]`

B. `#[message.outboundProperties.accountType]`

C. `#[flowVars.accountType]`

D. `#[message.inboundProperties.accountType]`

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 4

To avoid hard-coding values, a flow uses some property placeholders and the corresponding values are stored in a configuration file.

Where does the configuration file's location need to be specified in the Mule application?

A. `mule-deploy.properties`

B. A global element

C. `mule-app.properties`

D. A flow property


Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 5

Refer to the exhibits. A Mule application is configured to use the globalErrorHandler exception handler.

When the flow is executed, a request is made to a host that is offline and a Java exception is thrown with the message "Error sending HTTP request to http://offline.bad:80/".

What response is returned to a web client request to postToOfflineHostFlow's HTTP Listener?

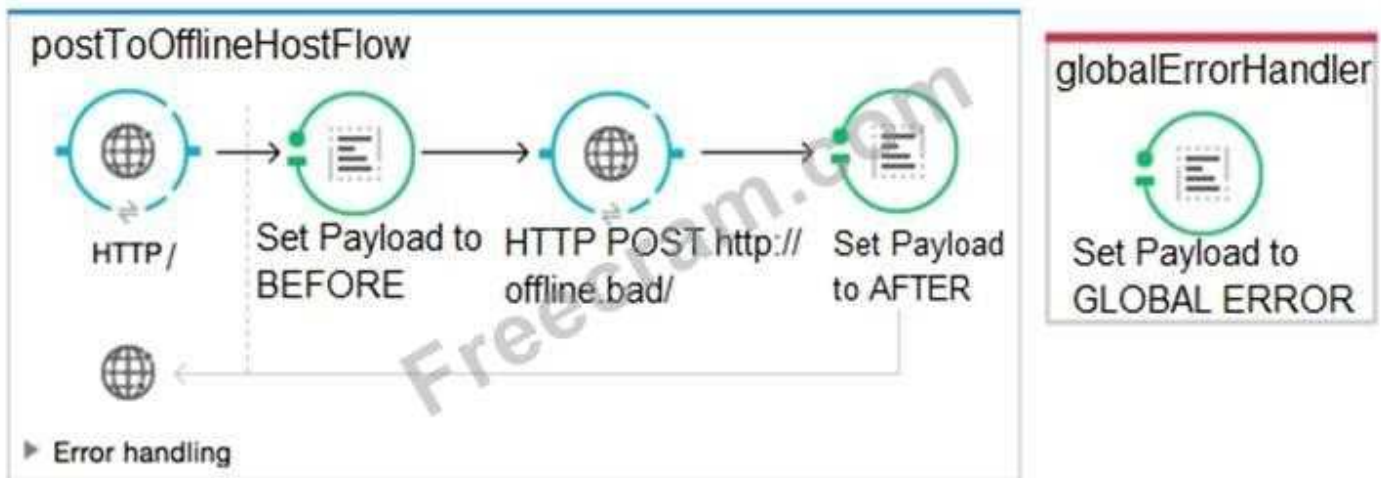


- A. BEFORE
- B. Errorsending
HTTP request to http://offline.bad:80/
- C. GLOBAL ERROR
- D. AFTER

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 6

Refer to the exhibit. How is the watermark referenced inside the Set Payload transformer?

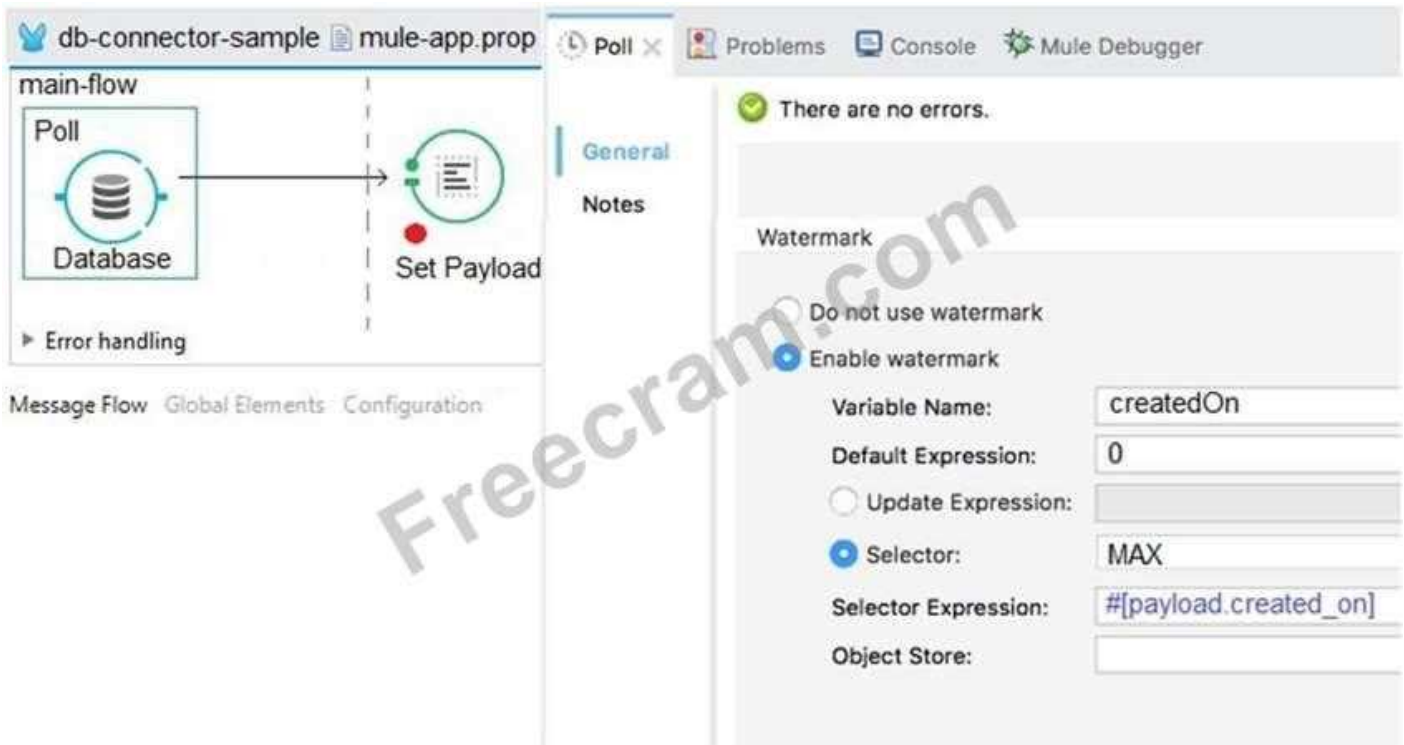


- A. #[message.inboundProperties.createdOn]
- B. #[message.outboundProperties.createdOn]
- C. #[payload.createdOn]
- D. #[flowVars.createdOn]

Answer: D (LEAVE A REPLY)

NEW QUESTION: 7

Refer to the exhibits. The parentFlow contains an HTTP Request. The HTTP Listeners and HTTP Request use default configurations.

What values are accessible in childFlow after a web client submits a request to `http://localhost:8081/order?color=red?`

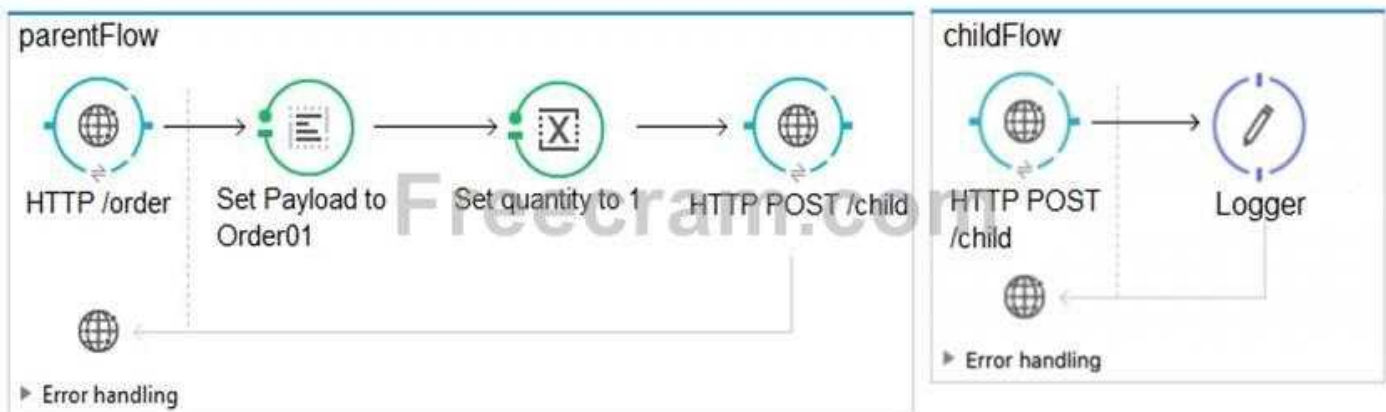

```
<http:request config-ref= "HTTP_Request_Configuration" path=
"child" method= "POST" doc:name= "HTTP POST /child"/>
</flow>
<flow name= "childFlow">
  <http:listener config-ref= "HTTP_Listener_Configuration" path=
"/child" allowedMethods= "POST" doc:name= "HTTP POST /child"/>
```

- A. payload
quantity var
- B. payload
color query param
- C. payload
quantity var
color query param
- D. payload
quantity var
color query param

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 8

Refer to the exhibit. A Payload Filter component processes a message with a non-empty payload. What happens when the payload does not match the Payload Filter type?

```
<payload-type-filter expectedType= "java.lang.String" doc:name= "Payload is not null"/>
```

- A. It throws a configurable exception
- B. It calls a compensation flow
- C. It silently stops processing the message
- D. It throws a Filter exception

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 9


What authentication data is required to configure a Throttling - SLA based policy in API Manager?

- A. Username and password
- B. OAuth2.0 access token
- C. X.509 client certificate and X.509 server certificate
- D. Client id and client secret

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 10

Refer to the exhibit. The parentFlow contains a Flow Reference for childFlow. What values are accessible in childFlow after a web client submits a request to `http://localhost:8081/order?color=red?`

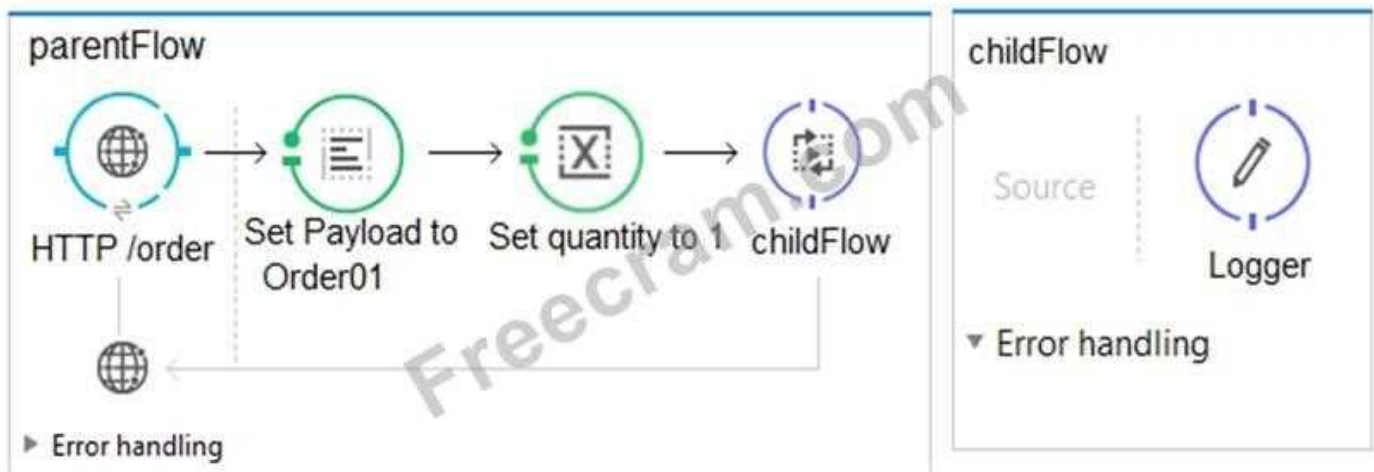

- A. payload
quantity var
- B. payload
color query param
- C. payload
quantity var
- D. payload
color query param

Answer: ([SHOW ANSWER](#))

Valid MCD-Assoc Dumps shared by PrepAwayExam.com for Helping Passing MCD-Assoc Exam! PrepAwayExam.com now offer the **newest MCD-Assoc exam dumps**, the PrepAwayExam.com MCD-Assoc exam **questions have been updated** and **answers have been corrected** get the **newest** PrepAwayExam.com MCD-Assoc dumps with Test Engine here: <https://www.prepawayexam.com/MuleSoft/braindumps.MCD-Assoc.ete.file.html> (62 Q&As Dumps, **40%OFF** Special Discount: **freecram**)